



WISI VS 50 PRO

WISI HONG KONG

About VS 50PRO


The VS 50 PRO is a programmable terrestrial filter with an integrated amplifier. Four VHF/UHF antennas can be connected via four F connectors, and one additional F connector is available for insertion of FM.

Also, 32 freely selectable channels can be programmed - a number that may be doubled to 64 by extending the channel bandwidth.

Moreover, the received terrestrial channels can be relocated to any required frequency, hence the VS 50 PRO is usable as a channel converter, to relocate UHF channels to a lower frequency range.

The high selectivity ensures a high signal quality of the converted channels. All settings are done by the control unit OH 41 (not included in the delivery scope).

COST EFFECTIVE

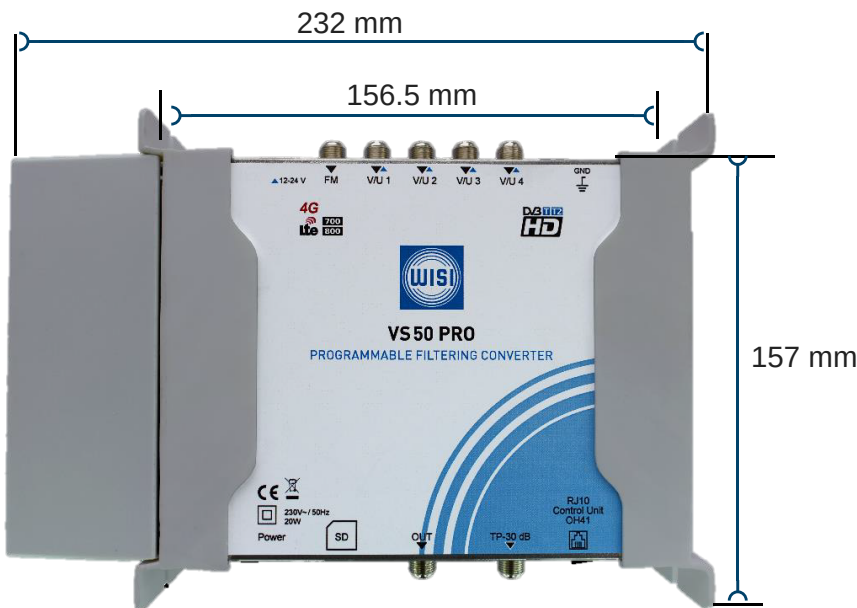

VS 50 PRO

WISI VS 50 PRO

WISI HONG KONG

Technical Data

Input	4 VHF/UHF & 1 FM
Output	1 (FM-VHF-UHF) & 1 test point (-30dB)
Frequency range	FM: 88 - 108 MHz; VHF: 174 - 240 MHz; UHF: 470 - 862 MHz
Output Level	110 dBμV
Conversion	Yes
Gain	FM: 35 dB; VHF: > 45 dB ; UHF: > 55 dB
AGC	Yes
Attenuator	0 - 20 dB

Connectors

F-socket	7
----------	---

General data

Power supply	100-240 VDC
Power	20 W



ONE VS50PRO CAN RECEIVE ALL SIGNAL WITHIN VHF AND UHF

For example,

Analog channels

Digital channels (DVB-T/T2) (DVB-C) (DTMB)

....

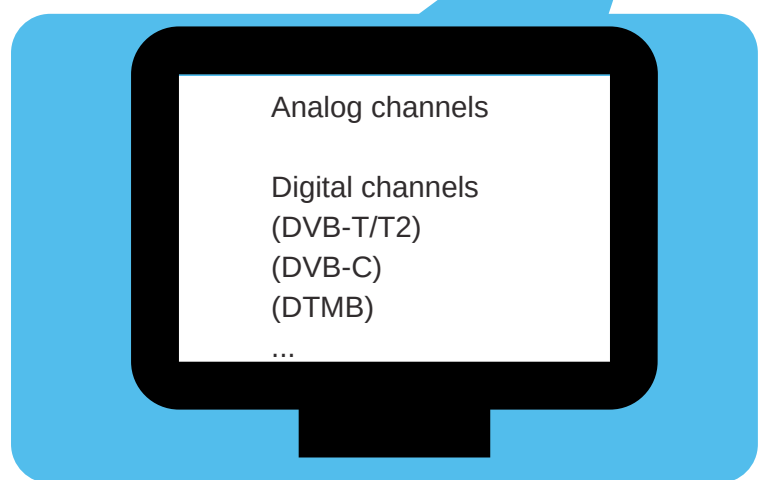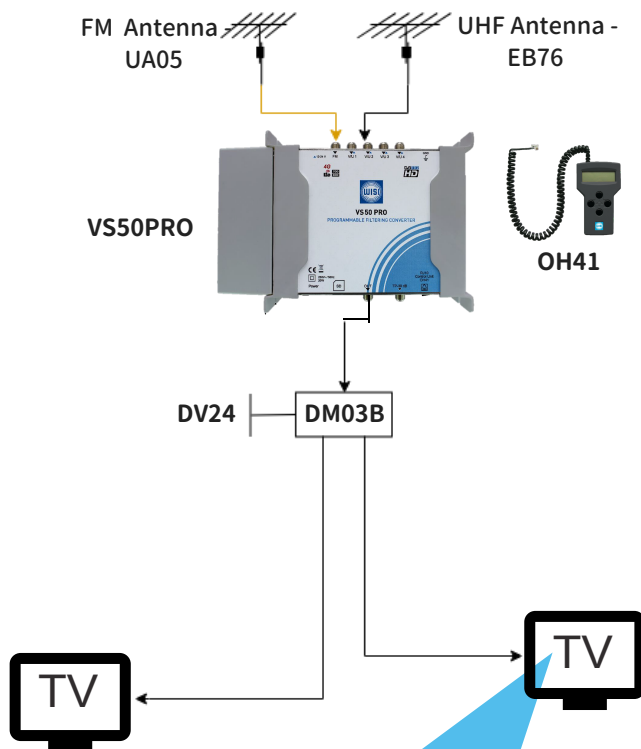

MULTI-PURPOSE